

Dimensions Long Arm Rubber Crawlers


Item	TB228	TB235	TB250
A Length (mm)	4460	5020	5550
B Width (mm)	1460	1630	1840
C Height in Transport (mm)	2445	2450	2515
D Slew Radius (mm)	1285	1395	1435
E Clearance Height (mm)	565	570	630
F Crawler Base (mm)	1440	1655	1985
G Crawler Length (mm)	1895	2110	2500
H Machine Width (mm)	1450	1630	1840
J Track Width (mm)	300	350	400
K Ground Clearance (mm)	300	295	335
L Minimum Radius of Equipment & Attachment (mm)	1885	1950	2235
M Minimum Radius of Equipment at Maximum Front Offset (mm)	1495	1535	1740
P Offset Left (mm)	540	615	715
Q Offset Right (mm)	560	620	710
R Dozer Width (mm)	1450	1630	1840
S Dozer Height (mm)	300	395	430
T Front Distance to Axis of Rotation (mm)	3135	3625	4150
U Dozer Blade Distance to Axis of Rotation (mm)	1240	1655	1720
V Offset Swing Angle LH	80°	80°	80°
W Offset Swing Angle RH	60°	60°	60°

Operating Ranges Long Arm Rubber Crawlers

Item	TB228	TB235	TB250
A Maximum Reach (mm)	4850	5465	6135
B Maximum Reach at Ground (mm)	4720	5345	5995
C Maximum Digging Depth (mm)	2875	3400	3785
D Maximum Vertical Digging Depth (mm)	2190	2600	2990
E Reach at Maximum Vertical Digging Depth (mm)	3325	3680	4055
F Maximum Height of Cutting Edge (mm)	4450	5240	5800
G Maximum Dumping Height (mm)	3190	3815	4175
H Minimum Dumping Height (mm)	985	1150	1295
J Dozer Blade Maximum Lifting (mm)	250	390	435
K Dozer Blade Maximum Lowering (mm)	280	405	355

For more information locally

call us direct, or contact:

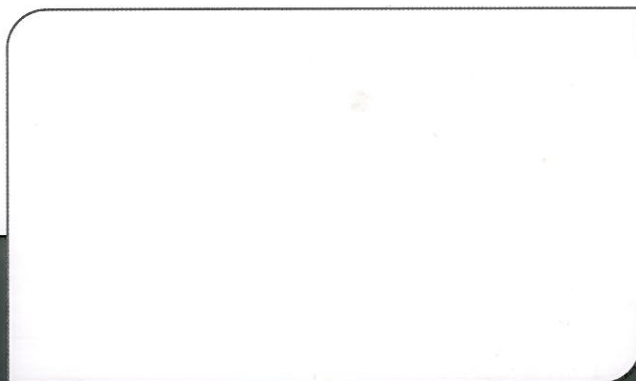

*Warranty exceptions to 1 year; fuel injection systems, electrical components, paint work.

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment.

Takeuchi Mfg (UK) Ltd, Unit E2B Kingsway Business Park,
John Boyd Dunlop Drive, Rochdale, Lancashire OL16 4NG
Tel: 01706 657 722 Fax: 01706 657 744

Southern Depot at 20 Colthrop Business Park
Colthrop Lane, Thatcham, Newbury, Berks RG19 4NB
Tel: 01635 877 196 Fax: 01635 877 195

www.takeuchi-mfg.co.uk Email: sales@takeuchi-mfg.co.uk

TAKEUCHI
Japanese for reliability